


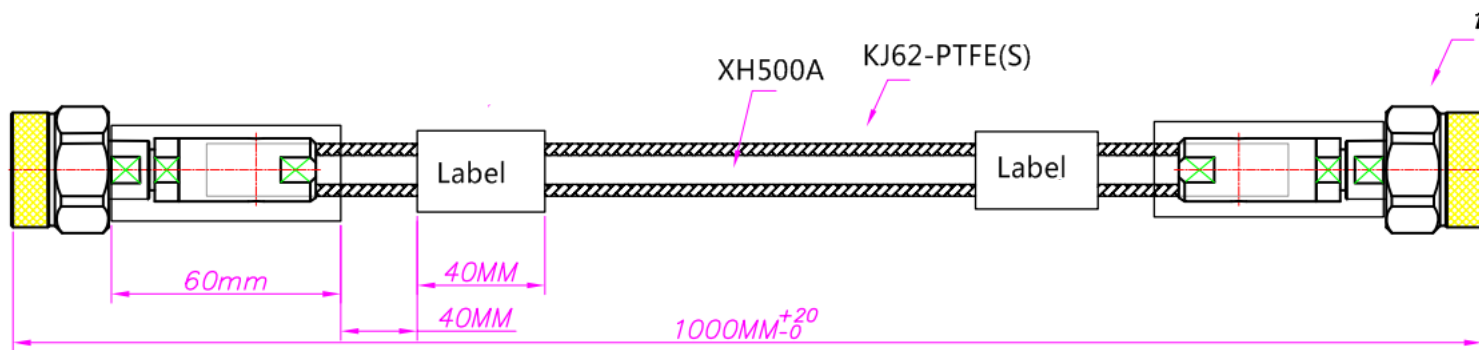

Electrical Data	Mechanical Data
Impedance: 50 Ω	Durability: ≥500times
Frequency: DC~18GHz	Temperature range: -55℃~+125℃
VSWR: ≤1.25	
Insertion Loss: ≤1.4dB	
Working voltage: 1500V rms	
Insulation resistance: ≥5000M Ω	
Material and Plating	
Center contact: Brass/Gold	
Outer contact: Stainless Steel/Passivated	
Body/Nut: Stainless Steel/Passivated	
Dielectric: PTFE	

EZCON Telecom Technology (Changzhou) Co., Ltd							
Description				Model			
Cable assembly				XH500A-N/J-N/J-1M-A			
Scale		Weight	9	Pages	1/1		
Unit	mm	Rev.	A0				

Design		Date	
Check		Date	
Approved		Date	

D

C

B

A