



REV.	LTR	ECN/DESCRIPTION	DATE
X1		NEW RELEASE	2015-11-02

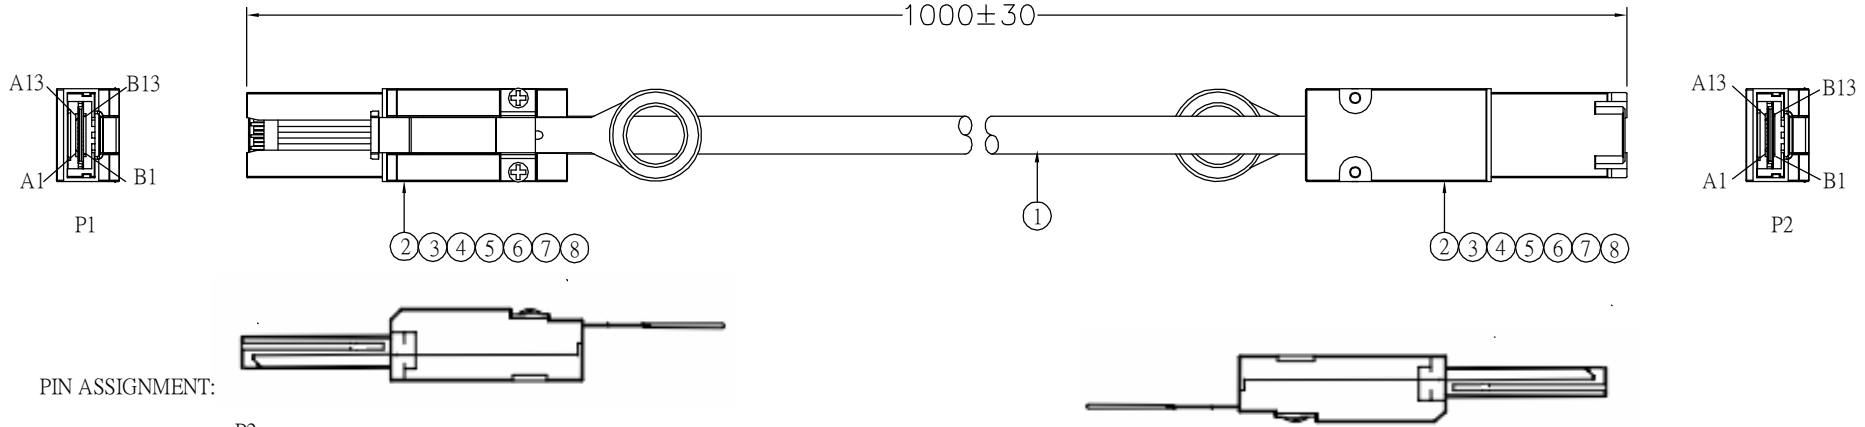

PIN ASSIGNMENT:

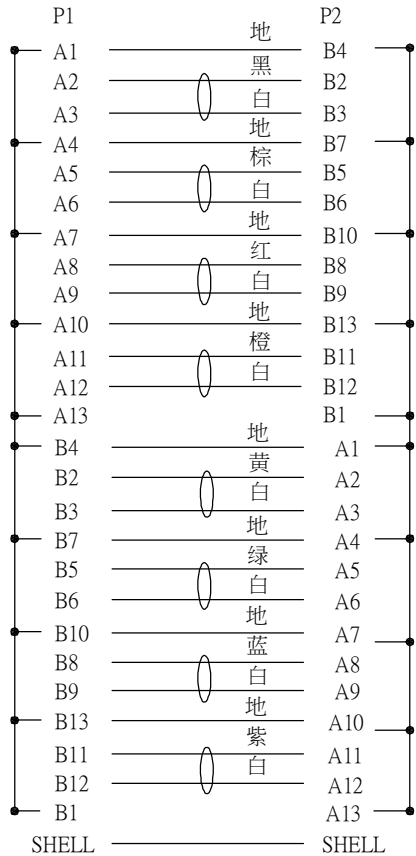

ELECTRICAL CHARACTER:

1. OPEN/SHORT/INTERMITTENCE 100% TEST.
2. HI-POT:300V DC/0.02SEC.200V AC/0.02SEC.
3. INSULATION RESISTANCE:5MΩ MIN/DC:300V.
4. CONDUCTIVE RESISTANCE:5Ω MAX.
5. RoHS COMPLIANT.

NO.	NAME	MATERIAL DESCRIPTION	Q'TY	UNITS
8	内模料	PE料 白色 低密度	A/R	KG
7	SCREW	SCREW M2*0.4-6H 100U" COPPER UNDERPLATED 100U" NICKEL PLATED OVER	4	PCS
6	拉環	PULL RING MINI SAS PLUG 拉環, PA66 BLUE	2	PCS
5	墊圈	61S GASKET 導電橡膠墊圈	2	PCS
4	彈片	61S LATCH SUS304 T=0.6mm	2	PCS
3	金屬裝配殼	HOOD TOP/BOOT HOOD ZINE ALLOY 100U" NICKEL PLATED OVER 80U" CU ALLOVER	2	SET
2	連接器	MINI SAS 26PIN PLUG PCB FR-4	2	PCS
1	線材	INFINIBAND CABLE UL20276 (28# 2C+D+AL+ML)*8C+ MYLAR+AL+B +P BLACK PVC JACKET OD:7.3mm	A/R	M

CUSTOMER DRAWING		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY:		TITLE: Mini SAS 26P TO Mini SAS 26P CABLE		极连电子科技(厦门)有限公司 Geelink Electronics Technology (xiamen) co.,LTD 厦门市海沧区东孚大道2879号台湾创业园6号楼208单元	
		SIZE A4	UNITS MM[INCH]	X±0.30 .XX±0.15 .XXX±0.10	X*±3.5° .X*±2.5° .XX*±2.0° .XXX*±1.5°	CHECKED BY:			
SCALE FREE		REV. X1		DESIGN BY:		DWG NO.:		SHEET 1/1	

